

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)**

3633-489

09/529672INTERNATIONAL APPLICATION NO
PCT/FR99/02010INTERNATIONAL FILING DATE
August 18, 1999PRIORITY DATE CLAIMED
August 18, 1998TITLE OF INVENTION
METHOD AND DEVICE FOR FURNACE-WORK PRODUCTION OF AN EXTRUDED STRING RIM PORTION ON AN OBJECT AND
ARTICLE COMPRISING SUCH AN OBJECTAPPLICANT(S) FOR DO/EO/US
Gerd CORNILS, Florian FISCHER and Stefan VERBEEK

Applicant herewith submits to the United States Designated/ Elected Office (DO/EO/US) the following items under 35 U.S.C. 371:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the international Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
- ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureaus.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
- ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
- ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 1 to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
 - 16a. First Page of WO 00/10793
 - 16b. International Search Report in English (4 pages) and in French (4 pages)
 - 16c. Formal Drawings (6 sheets, Figs. 1-7)

17. ☒ The U.S. National Fee (35 U.S.C. 371(c)(1)) and other fees as follows:

CLAIMS				
(1)FOR	(2)NUMBER FILED	(3)NUMBER EXTRA	(4)RATE	(5)CALCULATIONS
TOTAL CLAIMS	19 - 20	0	X \$ 18.00	\$ 0.00
INDEPENDENT CLAIMS	4 - 3	1	X \$ 78.00	78.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$ 260.00	□
BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): CHECK ONE BOX ONLY				
<input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482)			\$ 670	
<input type="checkbox"/> No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))			\$ 760	
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO			\$ 970	
<input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2) to (4)			\$ 96	
<input checked="" type="checkbox"/> Filing with EPO or JPO search report			\$ 840	\$ 840.00
Surcharge of \$130.00 for furnishing the National fee or oath or declaration later than <input checked="" type="checkbox"/> 20 30 mos. from the earliest claimed priority date (37 CFR 1.492(e)).			\$	130.00
TOTAL OF ABOVE CALCULATIONS			=	1,048.00
Reduction by 1/2 for filing by small entity, if applicable. Affidavit must be filed also. (Note 37 CFR 1.9, 1.27, 1.28).			-	\$ 0.00
SUBTOTAL			=	1,048.00
Processing fee of \$130.00 for furnishing the English Translation later than 20 30 mos. from the earliest claimed priority date (37 CFR 1.492(f)).			+	\$
TOTAL FEES ENCLOSED			\$	1,048.00

- ☐ A check in the amount of \$__ to cover the above fees is enclosed.
- ☒ Please charge Deposit Account No. 16-1150 in the amount of \$1,048.00 to cover the above fees. A copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 16-1150. A copy of this sheet is enclosed.

18. ☐ Other instructions
n/a19. ☒ All correspondence for this application should be mailed to
PENNIE & EDMONDS LLP
1667 K STREET, N.W.
WASHINGTON, D.C. 2000620. ☒ All telephone inquiries should be made to (202) 496-4720Harry C. Jones, III
NAME

SIGNATURE

20,280

REGISTRATION NUMBER

APRIL 18, 2000
DATE

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

U.S. National Phase of
International Application
No. PCT/FR99/02010

Attorney Docket No.: 3633-489

Int. Filing Date:
August 18, 1999

Group Art Unit: unassigned

Examiner: unassigned

Serial No.: to be assigned

For: METHOD AND DEVICE FOR
FURNACE-WORK PRODUCTION OF AN
EXTRUDED STRING RIM PORTION ON
AN OBJECT AND ARTICLE
COMPRISING SUCH AN OBJECT

Filed: Herewith

Inventors: Gerd Cornils et al.

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Please amend the above-identified application (with reference to the English translation) as follows.

IN THE SPECIFICATION:

Page 1, after the title, insert the heading --BACKGROUND OF THE INVENTION--;

Page 3, after line 37, insert the heading --SUMMARY OF THE INVENTION--.

Page 8, after line 14, insert the heading --BRIEF DESCRIPTION OF THE
DRAWINGS--.

Page 8, after line 33, insert the heading --DETAILED DESCRIPTION OF THE
INVENTION--.

IN THE CLAIMS

At the top of the page, delete "Claims" and insert, at the left margin, "We Claim".

Amend the claims as follows:

1. (Once Amended) [Process] In a process for the fashioning of a portion (3) of a profiled bead (2) extruded along a path onto an object, in particular a pane (1), in which process an initially shapeless mass (4) of material is produced in the portion (3) [in question] and is given the desired final shape by contact with a shaped surface of a moving tool (5), any excess material being automatically expelled from the tool in order to be removed, **[characterized in that]** the improvement wherein the mass (4) of material is produced by the superposition of two segments (2a, 2b) of the extruded strip, with the [following] steps of:

[-] [the] guiding an extrusion die (D) [is guided] along a first segment (2a) of the intended path of a profiled bead (2), including the portion (3) to be fashioned;

[-] moving the die (D) [is taken] away from the object (1) and, [is moved,] relative to the object (1), to an adjacent position of the portion (3) to be fashioned; and

[-] guiding the die (D) [is guided again,] along a second segment (2b) of the path of the profiled bead (2), also including the portion (3) to be fashioned.

2. (Once Amended) Process according to Claim 1 for the fashioning of a corner (3) in the profiled bead (2), especially in a corner of the object, **[characterized in that]** wherein the die (D) is moved relative to the object (1) by changing the relative orientation of the die (D) with respect to the object (1), especially by rotation through [the] a desired angle, **[and in that]** and by guiding the die (D) [is guided] in the new direction thus obtained.

3. (Once Amended) Process according to Claim 2, [**characterized in that**] wherein the first (2a) and/or second (2b) segment extend/extends beyond the perimeter of the object (1) so that the fashioned portion (3) projects beyond [the] an end face of the object (1).

4. (Once Amended) Process according to [any one of the preceding claims, **characterized in that,**] claim 1, wherein after the first segment (2a) has been extruded, the die (D) is moved by passing it over [that] a region of the first segment (2a) which includes the portion (3) to be fashioned.

5. (Once Amended) Process according to [any one of the preceding claims, **characterized in that**] claim 1, wherein the extrudable material continues to be delivered by the die (D) while the latter is being moved.

6. (Once Amended) Process according to [any one of the preceding claims, **characterized in that**] claim 1, wherein the moving tool (5) is applied against the portion (3) to be fashioned just after the die (D) has left that region of the second segment (2b) which includes this portion, in the actual extrusion station (E), without the object (1) being moved, transferred or repositioned.

7. (Once Amended) Process according to Claim 6, [**characterized in that**] wherein the moving tool (5) is automatically brought from a rest position to its working position immediately after the mass has been extruded and the extrusion die (D) has continued its travel, is automatically aligned with the profiled bead (2) and is brought into contact with the shapeless mass (4) in order to fashion it.

8. (Once Amended) [Device] In a device for the fashioning of a portion of a profiled bead (2) extruded onto an object, [-] in particular onto a pane (1), [-] fastened in a treatment station (E), in particular for implementing the process according to Claim 1, in which device a moving calibrated tool (5) [may be] is brought into contact with the said strip portion, comprising an initially shapeless accumulation of material (4), and applies against the latter a shaped surface corresponding to the uniform profile of the profiled bead, and in which device means are provided for cutting and removing the excess material, [**being characterized by the fact that**] the improvement wherein the tool (5) is connect in a locally adjustable manner to [the] a treatment station (E) provided for laying down the profiled bead (2) and [can be] is moved between a rest position and a working position in contact with the object (1) fastened in the treatment station (E), by means of an actuating device (8), and [in that] means (10, 11, 17) are provided for the correct and automatic adjustment of the relative position between the tool (5) and the object (1).

9. (Once Amended) Device according to [Claim 6, **being characterized by the** fact that] claim 8, wherein the means for adjusting the position comprise at least one laying face (17) to be applied against the object (1) and a bearing (10, 11) having a spherical movement allowing adjustment of the position parallel to one face of the object.

10. (Once Amended) Device according to Claim 9, **[being characterized by the fact that]** wherein the bearing having a spherical movement is formed by a ball (10) fastened to a support frame (7) of the tool (5) and by a recess (11) receiving the said ball (10) in [the] a baseplate (12) of the tool (5), which baseplate is made adjustable in a base portion with respect to the support frame (7) by springs (13).

11. (Once Amended) Device according to Claim [9 or] 10, **[being characterized by the fact that]** wherein the tool (5) furthermore comprises a sealing rim (16) to be applied against a perimeter of the object.

12. (Once Amended) Device according to Claim 11, **[being characterized by the fact that]** wherein the sealing rim (16) and the laying face (17) are formed in a removable stop (15) fastened to the baseplate (12).

13. (Once Amended) Device according to [one of the previous device claims, **being characterized by the fact that]** claim 8, wherein the tool (5) comprises a punch (20) which can be moved by means of a cylinder (21) and has a surface for forming the profiled bead (2).

14. (Once Amended) Device according to Claim 13, **[being characterized by the fact that]** wherein a forming gasket (23) is fastened to the punch (20), which gasket, when the punch (20) is applied against the object, comes into contact with the top side of the latter and with the profiled bead, and the thickness of which gasket corresponds to the height of the profiled bead fashioned.

15. (Once Amended) Device according to [one of the previous device claims, **being characterized by the fact that]** claim 8, wherein the tool (5) includes a cutting edge (19) for cutting the excess material from the fashioned portion of the profiled bead (2).

16. (Once Amended) Device according to [one of the preceding device claims, **being characterized by** the fact that] claim 8, wherein the support frame (7) of the tool (5) is adjustable with respect to the treatment station (E) for various shapes of objects.

17. (Once Amended) Device according to device Claim 16, [**being characterized by** the fact that] wherein the actuating device includes a driving means (8) connected to the support frame (7).

18. (Once Amended) [Article] In an article, especially a window, comprising an object (1) provided with a profiled bead (2) extruded onto the object (1) and having a fashioned portion (3), [**characterized in that**] the improvement wherein the fashioned portion (3) consists of a continuous folded ribbon of extruded material, in which ribbon the contiguous surfaces of the fold or folds adhere to each other along a possibly pellicular interface, and which ribbon is fashioned by contact with a shaped surface.

19. (Once Amended) [Article] In an article, especially a window, comprising an object, especially a pane (1), provided with a profiled bead (2) extruded onto the object (1) and having at least one corner portion (3), [**characterized in that at**] the improvement wherein the at least one corner portion consists of the superposition of at least two partial beads (2a, 2b) which adhere to each other along a possibly pellicular interface, and which superposed bead is fashioned by contact with a shaped surface.

REMARKS

The specification and claims have been amended to conform to U.S. practice.

An action on the merits of the claims is respectfully requested.

Respectfully submitted,

Date APRIL 18, 2000


Harry C. Jones, III 20,280
(Reg. No.)

PENNIE & EDMONDS LLP
1667 K Street, N.W.
Washington, DC 20006
(202) 496-4400

00340" 24962960

Description

Process and device for fashioning a portion of a
profiled bead extruded onto an object, and article
comprising such an object

The invention relates to the field of the manufacture of objects provided with profiled elements made of plastic, such as windows provided with 10 ornamental or sealing strips. It relates more particularly to a process for fashioning a portion of a profiled bead extruded onto an object, and to articles resulting therefrom, as well as to a device especially designed to implement this process.

15 It is generally known to deposit profiled beads of
polymer, for example along the edge of a pane, by
continuous extrusion, and to use them directly as a
sealing strip, especially for windows fitted into a
frame by bonding. Suitable sections of strips help, on
20 the one hand, to centre the window when fitting it into
a frame or chassis, for example into a body opening,
and guarantee, on the other hand, the position of the
window while the adhesive usually employed is curing.
Compared with the injection moulding of such strips,
25 which is also known, extrusion has the advantage of
greater flexibility since it is not necessary to keep a
specific mould for each shape of pane, but all that is
required is to guide an extrusion die of calibrated
cross section along the edge of the pane, the extrusion
30 die being controlled by a programmable robot, with a
defined, generally continuous, flow of material.

Sometimes it is also required to cover corner parts in the window opening with the bead of the sealing strip. Compared with the main cross section of the profiled bead, which is fixedly predetermined by the calibrated shape of the extrusion die, more material is needed in such corner regions. According to Patent DE-C-196 04 397, there exists an extrusion die whose cross section can automatically increase in the

corner regions of a pane. Furthermore, the die comprises two channels for supplying the polymer, in each of which the volume flow rate may be controlled independently of one another by valves. Overall, the additional material needed compared with the bead of normal profile is extruded in a continuous path with the desired cross section. However, such a die is very expensive to manufacture.

It is also known to subsequently touch up the extruded strip in such regions where modification of the profile is required, or in "critical" regions such as the join region between the start and end of the extrusion.

Certain existing solutions thus modify the cross section of the bead by cutting off a defined portion of the bead in a corner region or join region and by filling the gaps thus created by injecting an additional material which joins up with the profiled bead (EP-B 0,524,060), or add additional material for filling the corners by injection onto the continuous profiled bead of uniform cross section in a work phase after the extrusion (cf. DE-C-195 37 693).

In practice, the windows have hitherto been removed from the extrusion station before the profiled bead is touched up and are repositioned in a separate touch-up station. The extrusion station therefore has the best possible occupancy since, before injection of additional material or partial cutting and filling of the gap created, it is necessary to wait for a hold time until the extruded material has stabilized sufficiently.

It is also already known, from Patent DE 4,445,258 C2, to touch up the join region between the start and end of a profiled bead made of extruded polymer surrounding the edge of a pane by means of a multipart compression mould which executes a closure movement going from the centre of the pane towards the external edge so that the excess material in the join region is expelled to the outside and is detached therefrom by a

cutting edge carried by the compression tool. However, the particular direction of operation of that known device leads to a bulky system for which there is not enough space in the immediate vicinity of an extrusion station. Thus, all the windows in that device must also be refitted and repositioned separately.

Another known postforming tool (DE-U-90 11 573) for profiled beads of extruded polyurethane is also designed in such a way that the panes must be positioned with respect to the device and cannot therefore be touched up directly in the extrusion station.

Touch-up processes with transfer of the window furthermore have the drawback that the solutions proposed do not always give exactly the expected result with, in particular, visible transition marks on the postformed region which are due to the addition of fresh material alongside the earlier extruded material which has already at least partially cured.

It is therefore desired to find improved processes, with a more reliable appearance result, preferably by reducing the cost compared with that currently borne, in the techniques using postforming or filling especially by injection moulding, by the succession of steps of transferring each window provided with the moulded profiled bead out of the extrusion station, of fitting and positioning the following touch-up station and finally of fashioning the critical portion.

Thus, the object of the invention is to present a process which markedly improves the touching-up, in particular by decreasing the hold time for the postforming of critical regions of a profiled bead, especially corner regions and/or join regions. A corresponding device, which is also advantageously as compact as possible, especially suitable for implementing this process, may also be proposed.

The subject of the invention is thus a process for the fashioning of a portion of a profiled bead extruded

35 This process is particularly useful for the local production of particular shapes in limited regions of the strip, in particular for corner regions which are more difficult to produce the more acute-angled the corner.

According to one particular embodiment for fashioning a corner, especially an acute-angled corner, the die is moved relative to the object by changing the relative orientation of the die with respect to the object, especially by rotation through the desired angle, and the die is guided, in the new direction thus obtained, along the following side of the object.

In one particular case, the first and/or second segment extend/extends beyond the perimeter of the object so that the fashioned portion projects beyond the end face of the object.

In general, it is not necessary to interrupt the flow of material during intermediate movement of the die.

According to an advantageous variant, the accumulation of material is formed by moving the die, after the first segment has been extruded, by passing it over that region of the first segment which includes the portion to be fashioned. In the region in question, the material thus forms a kind of ribbon folded back on itself, in which the superposed layers (or folds) adhere perfectly to each other.

In this regard, the subject of the invention is also novel products, especially:

- an article, especially a window, comprising an object provided with a profiled bead extruded onto the object and having a fashioned portion, characterized in that the fashioned portion consists of a continuous folded ribbon of extruded material, in which ribbon the opposed surfaces of the fold or folds adhere to each other along a possibly pellicular interface, which ribbon is fashioned by contact with a shaped surface;

- an article, especially a window, comprising an object, especially a pane, provided with a profiled bead extruded onto the object and having at least one corner portion, characterized in that at least one corner portion consists of the superposition of at least two partial beads which adhere to each other along a possibly pellicular interface, which superposed

bead portion is fashioned by contact with a shaped surface.

In fact, depending especially on the plastic used, on the extrusion rate, on the ambient temperature or the ambient moisture content, the material deposited on the first partial bead may be partially modified before the material of the second partial bead has been superposed on it. Thus, the plastic in the fashioned region is in general relatively heterogeneous, although giving the bead sufficient cohesion by the respective layers adhering to each other.

In extreme cases, there may even form on the surface of the first partial bead a kind of skin or film which is completely compatible with the material deposited on top of it just afterwards, but which may be visible if a longitudinal section of the product is examined.

The extruded material is advantageously of the thermoplastic type, for example a thermoplastic elastomer (TPE) or a thermoplastic olefin (TPO). Materials not having an excessive tack are preferred so as to facilitate the fashioning operations, especially the removal of the shaped surface.

With thermoplastics, it may be advantageous to heat the bead portion or portions to be fashioned before and/or during the fashioning.

The object of the invention is also a device for the fashioning of a portion of a profiled bead extruded onto an object - in particular onto a pane - fastened in a treatment station, in particular for implementing the process according to the invention, in which device a moving calibrated tool may be brought into contact with the said strip portion, comprising an initially shapeless accumulation of material, and applies against the latter a shaped surface corresponding to the uniform profile of the profiled bead, and in which device means are provided for cutting and removing the excess material, being characterized by the fact that the tool is connected in a locally adjustable manner to

the treatment station provided for laying down the profiled bead and can be moved between a rest position and a working position in contact with the object fastened in the treatment station, by means of an actuating device, and in that means are provided for the correct and automatic adjustment of the relative position between the tool and the object.

According to a preferred embodiment of the invention, the postforming device will be automatically positioned directly after the extrusion of an accumulation of material at the respective critical point along the profiled bead, after the extrusion die has continued its travel without the window to be treated having been transferred and also before the extruded material has been cured, in order to give the desired dimensions to that region of the profiled bead in question, so that it matches, without any transition, the dimensions of the adjacent portion of profiled bead being formed, while any excess material will be expelled and automatically removed.

Thus, for the same occupancy of the extrusion station, a substantial time saving will be obtained in the subsequent treatment of the critical regions of the profiled bead as they can now be formed in line during the continuation of the extrusion process, and therefore without additional handling of the window which is positioned only once in the extrusion station.

Further advantages of the process are a substantial reduction in the risk of damage when handling the windows and a reduction in or even elimination of the costs of touching up for removing the excess material from the bead. Finally, the need for space for the additional touch-up station in the manufacturing plant also disappears.

In the case of filling corner regions, according to a development of the process, the necessary accumulation of material will be produced by taking the extrusion die away from the edge of the window, rotating it and applying it again at the point of

separation by superposing two profile portions. Because of the plasticity of the material, the accumulation is initially shapeless. However, just after the extrusion die has continued its travel, it will be adjusted to the cross section of the profiled bead by means of the automatically positionable tool.

Further features and advantages of the subject of the invention will emerge from the following detailed description and the illustration of an example of the implementation of a process and of an embodiment of a device according to the invention.

In the example of the postforming of a corner of a profiled bead made of thermoplastic elastomer (TPE) which is deposited on a window:

Figure 1 shows a detail of an extrusion station with which a postforming device is associated;

Figure 2 is a view of the corner region immediately before a profiled bead that has just been extruded is postformed;

Figure 3 is a view of an embodiment of the postforming tool with an actuating device for applying the tool to the window;

Figure 4 is a partial sectional view of the postforming tool in Figure 2, which is in the working position on the window and on the profiled bead;

Figure 5 is a view of a stop provided for adjusting the postforming tool on the end face of the window - a detail of Figure 3;

Figure 6 is a view of a lower part of the mould with a cutting edge provided for cutting the excess material - a detail of Figure 3; and

Figure 7 is a view of the corner region of Figure 1 after the postforming.

In Figure 1, a pane 1, for example made of monolithic toughened safety glass, is positioned and fixed in an extrusion station E. Also included in this figure, purely schematically, are a support A as well as an extrusion die D which is controlled by a robot. This extrusion die deposits, directly along one edge, a

profiled bead 2 of thermoplastic elastomer (TPE) on the upwardly facing main face of the pane 1. Its direction of movement is implicated by an arrow F pointing to the right. It is approximately parallel to the edge of the pane 1. A postforming tool 5, forming part of the extrusion station E, is placed at at least one of the corners of the pane 1. Here, it is connected to the support A by a bracket K, which is merely sketched. Thus, it can work directly on the profiled bead 2 extruded by the die D. The pane need therefore no longer be firstly removed from the support A and then repositioned. A more detailed description of this postforming tool 5 and of its method of operation is given below.

In Figure 2, an accumulation 4 of TPE has been produced at a corner 3 of the pane 1. In the present case, the die D, being guided along a first side of the pane in the direction of the arrow Fa, has for this purpose been brought beyond the corner 3 when it has reached the corner region and has been taken away from the edge of the window. Thus, a first bead segment 2a is formed, which includes the portion to be fashioned into a corner. Next, the die is rotated and again placed on the same corner 3. By guiding the die in the new direction of advance along the following side, in the direction of the arrow Fb, a second bead segment 2b is formed. It is not necessary to interrupt the extrusion process when transferring the die.

The extrudate is therefore applied twice in a limited region, in this case crossing the superposed portions, in a comparable manner at the start and end of the profiled bead, except that the deposition of the upper portion follows immediately the deposition of the lower portion. The bead portion 2b deposited last is on top. However, its material can mix with the covered portion 2a which has not yet been cured.

This produces an accumulation of material 4 which initially is shapeless and is illustrated here purely schematically.

Depending on the speed of movement of the die and the curing kinetics of the extruded material in particular, this shapeless mass, which may have approximately the shape of a ribbon folded back on itself when the flow of polymer has not stopped during transfer of the die, may contain, at the interface between the superposed portions, possibly between the folds of the ribbon, a pellicular interface due to very limited curing of the material, which pellicular interface in no way impairs the mutual adhesion of the segments 2a and 2b and therefore the cohesion of the fashioned region 3, despite its relatively heterogeneous internal structure.

Just after the extrusion die has left this corner region, to continue applying the profiled bead 2, the tool 5 is transferred from its rest position, illustrated in Figure 3, to its working position, illustrated in Figure 4, by a tilting movement, this taking place well before the end of the extrusion process, and therefore without the position or location of the window 1 having to be changed. Although any collision between the die D and the tool 5 is excluded in the rest position, the working position - as clearly shown in Figure 1 - lies in the working region of the extrusion die. In the working position, the tool 5 is brought into contact with the pane 1 and with the profiled bead 2 which can still be fashioned. It gives the accumulated material 4, which may still be seen in Figure 3, its shape and produces the final configuration of the corner of the profiled bead 2, as illustrated in Figure 7.

Since the time between the formation of the shapeless mass 4 and the action of the tool 5 is very short, there is no significant surface curing of the bead and the shaped surface of the tool 5 leaves virtually no trace on either side of the mould at the boundary of the fashioned region, this being an appreciable advantage over the known processes.

An even more detailed discussion of the features of the tool 5 and of its method of operation will be given below. As support 6 for the tool, it is preferred to use a table, or an equivalent, which is firmly connected to the extrusion station E (support A and bracket K in Figure 1). The support frame 7 of the tool is movable, in this case swinging about a pin connected to the base 6. An actuator 8, which here is illustrated by a pneumatic cylinder, is fastened to the support frame 7 and causes the tool 5 to undergo a to-and-fro motion between the working and rest positions.

In addition, the position of the tool is completely adjustable within the station so that various shapes of panes can be treated. The adjustment is illustrated here by the slideways of a carriage. However, the adjustment can also be made in any other suitable manner. Of course, such a tool 5 may be placed, if necessary, at each corner of the pane in the extrusion station. Should, for example, several corners in a profiled bead be requested by the window's purchaser, the corresponding number of compact postforming tools would then preferably be attached to the extrusion station in order to achieve the time-saving advantage associated with the invention.

In the Figure 3, the postforming tool is open, while Figure 4 shows it in the process of working with the closed mould parts. The latter grip with the edge of the pane 1 on three sides and therefore completely enclose the profiled bead 2 in a manner known per se. As is apparent in Figure 1, the movement of the tool 5 towards the pane 1 is preferably executed approximately in the direction of the bisector of the angle at the corner 3.

In the embodiment illustrated, a swivel 9 with a spherical head (ball) 10 rises up from the support frame 7 towards the tool. This ball is set in a recess 11 in a baseplate 12 of the tool. The said baseplate is flexibly supported, some distance from the support frame 7, by means of bearing springs 13 (formed here by

conical helical springs). It is therefore mounted on the support frame 7 while still being able to move in the three directions about the centre of the ball 10. Furthermore, it can be oriented (rotated) in its main plane, at least in a limited fashion. The bearing springs 13 centre it in an initial position. The angular position of the baseplate 12 with respect to the support frame 7 may be preset by means of set screws 14 which are inserted through the bearing springs 13. A temperature probe (not illustrated) may be mounted on the baseplate and serve for regulating a device for heating or for maintaining the temperature of the baseplate.

It is generally advantageous to heat the postforming tool for postforming the thermoplastic elastomers. In particular, it may be useful for the joining regions of the portion of profiled bead to be postformed also to be kept hot so as to obtain a smooth a join as possible. However, the heating cost is not high in the case of the process discussed here, because, between depositing the accumulation of material and the postforming, only a very short time interval has elapsed and the profiled bead has therefore not yet cooled.

A removable stop 15 is solidly attached to the baseplate 12. An enlarged complete view of it is given in detail in Figure 5. The stop clearly forms a dihedron in the sketch. Machined on the upper face of the stop is a sealing rim 16 which is exactly matched to the corner 3 of the pane 1 as well as to the mould for touching up the peripheral end face of the latter. For this purpose, this sealing rim may in particular be provided with a groove. It gradually transforms into a laying surface 17. A chamfer is provided along the outer edge of the laying surface 17, as an engagement bevel for applying the stop 15 against the pane 1.

In Figure 4, it may be clearly seen that the sealing rim 16 is applied against the external edge (end face) of the pane 1 in the working position of the

00840"22962560

tool 5. The laying surface 17 is placed flat against the underside of the pane and thus aligns the tool 5 in the plane of the edge of the pane. For this process, no specific driving means is required. As reproduced in the illustration, the profiled bead is applied, by the extrusion die, exactly on the top side of the pane 1 so that, when the stop 15 is engaged on the pane 1, no polymer material can be jammed between its peripheral end face and the sealing rim 16.

Thus, when the tool is brought and pressed against the pane by the actuator 8, the baseplate 12 - and therefore the entire tool 5 - may, together with its movable assembly, be automatically matched precisely to the position of the pane and to any dimensional discrepancies in the cutting and the size of the end faces of the pane.

The stop 15 is preferably composed of a low-friction plastic, for example PTFE, since the stop comes up against the pane 1 from below during tilting of the tool and slides along this underside. The tilting movement may, in general, be also illustrated by a straight insertion movement. Preferably, the tool is then applied obliquely from the side of the pane not provided with the profiled bead.

A lower mould part 18, an enlargement of which is illustrated in the sketch in Figure 6, is furthermore fastened to the baseplate 12. As mentioned above, the profiled bead 2 is only on the top side of the pane 1, with a lip overhanging the perimeter of the pane, and there is no contact with the peripheral end face. The extrudate to be applied must be sufficiently viscous to allow such shaping. The lower mould part 18 is fastened, with respect to the stop 15, in such a way that it supports, from underneath, the region to be postformed (lips) of the profiled bead 2 and at the same time completely covers the stop 15 with respect to the extruded mass. Formed on its usually smooth upper face is a cutting edge 19 having a sawtooth cross section. Its abrupt flank (of steepest slope in

relation to the plane of the pane) is directed towards the profiled bead, and its height corresponds to the desired thickness of the projecting lip of the profiled bead 2. As may be seen in the sketch, the lower mould part makes an angle, the internal side of which once again follows the profile of the end face of the pane at a constant distance from the corner region.

As the upper part of the mould, the tool 5 additionally comprises a punch 20 which may be raised and lowered with respect to the baseplate 12 using a cylinder 21. A rigid connection 22 between the cylinder and the baseplate guarantees that the punch 20 exactly follows the engagement movement as the tool 5 is being applied against the pane 1. On the essentially flat moulding face of the punch 20 there is a gasket 23 applied as an additional thickness to the face of the punch. The thickness of the gasket is predetermined by the desired height of the profiled bead 2 on the pane 1.

In the rest position and during transfer of the tool into its working position, the punch 20 is raised. The opening between the punch 20 and the lower mould part must be large enough for the raised punch 20 and the gasket 23 not to come into contact with the profiled bead 2 while the tool is being brought into the working position.

After the tool has been automatically aligned on the corner of the pane, the punch 20 is lowered onto the pane 1 using the cylinder 21. Thus, the gasket is placed directly on the top side of the pane 1. In the region of accumulation of material, i.e. in the acute angle, a cavity or tunnel is now formed which is open on either side of the corner 3 and the cross section of which corresponds to the normal profile of the profiled bead and is bounded or circumscribed by:

- the top side of the pane (on the contact surface provided);

- the surface of the lower mould part as far as the end of the cutting edge (below the lip);

- the lower face of the compression punch as far as the gasket; and

- the perimeter of the gasket lying on the side facing the edge of the pane.

5 Along its longitudinal direction, the cross section of this tunnel or cavity may be of any desired shape, so that it is possible to obtain, in particular, the desired fashioning in the corner region with a corner-shape distended lip, as is illustrated in Figure
10 7. If necessary, the corner region may also be fashioned with a rib or the like running along the upper face of the profiled bead.

23 The abovementioned outer perimeter of the gasket thus serves for forming and limiting the edge of the
15 profiled bead 2, facing the middle of the pane, in the corner region. It thus also makes an angle which corresponds to the apex angle of the lower mould part and is aligned precisely with the latter. However, in the corner region, this break is sufficiently rounded
20 so that a small expulsion space is formed between the region of material accumulation 4 and the front edge of the gasket. The material expelled towards the middle of the pane during the postforming can fill this space. On the other side, lying beyond the pane 1, the excess
25 material which is expelled into the abovementioned cavity is cut off between the cutting edge 19 and the lower face of the punch 20 and falls out of the tool at the latest during return of the latter to its rest position. Prototypes have demonstrated that, in
30 general, no residue of material continues to adhere to the cutting edge, and that remnants that have adhered may easily be removed. However, the cylinder 21 of the punch 20 must not exert excessively high forces, so that the rigid connection 22 need no longer be of a
35 particularly robust design.

Moreover, the stop 15, the lower mould part 18 with the cutting edge 19 and the face of the punch 20 with the gasket 23 are components of the tool which must be manufactured specifically for each shape of

5

10

15

Claims

1. Process for the fashioning of a portion (3) of a profiled bead (2) extruded onto an object, in particular a pane (1), in which process an initially shapeless mass (4) of material is produced in the portion (3) in question and is given the desired final shape by contact with a shaped surface of a moving tool (5), any excess material being automatically expelled from the tool in order to be removed, **characterized in that** the mass (4) of material is produced by the superposition of two segments (2a, 2b) of the extruded strip, with the following steps:

- the extrusion die (D) is guided along a first segment (2a) of the intended path of the profiled bead (2), including the portion (3) to be fashioned;

- the die (D) is taken away from the object (1) and is moved, relative to the object (1), to an adjacent position of the portion (3) to be fashioned;

- the die (D) is guided again, along a second segment (2b) of the path of the profiled bead (2), also including the portion (3) to be fashioned.

2. Process according to Claim 1 for the fashioning of a corner (3) in the profiled bead (2), especially in a corner of the object, **characterized in that** the die (D) is moved relative to the object (1) by changing the relative orientation of the die (D) with respect to the object (1), especially by rotation through the desired angle, **and in that** the die (D) is guided in the new direction thus obtained.

3. Process according to Claim 2, **characterized in that** the first (2a) and/or second (2b) segment extend/extends beyond the perimeter of the object (1) so that the fashioned portion (3) projects beyond the end face of the object (1).

4. Process according to any one of the preceding claims, **characterized in that**, after the first segment (2a) has been extruded, the die (D) is moved by passing

009670" 22962560

5. Process according to any one of the preceding claims, **characterized in that** the extrudable material continues to be delivered by the die (D) while the latter is being moved.

6. Process according to any one of the preceding claims, **characterized in that** the moving tool (5) is applied against the portion (3) to be fashioned just after the die (D) has left that region of the second segment (2b) which includes this portion, in the actual extrusion station (E), without the object (1) being moved, transferred or repositioned.

7. Process according to Claim 6, **characterized in that** the moving tool (5) is automatically brought from a rest position to its working position immediately after the mass has been extruded and the extrusion die (D) has continued its travel, is automatically aligned with the profiled bead (2) and is brought into contact with the shapeless mass (4) in order to fashion it.

8. Device for the fashioning of a portion of a profiled bead (2) extruded onto an object - in particular onto a pane (1) - fastened in a treatment station (E), in particular for implementing the process according to Claim 1, in which device a moving calibrated tool (5) may be brought into contact with the said strip portion, comprising an initially shapeless accumulation of material (4), and applies against the latter a shaped surface corresponding to the uniform profile of the profiled bead, and in which device means are provided for cutting and removing the excess material, **being characterized** by the fact that the tool (5) is connected in a locally adjustable manner to the treatment station (E) provided for laying down the profiled bead (2) and can be moved between a rest position and a working position in contact with the object (1) fastened in the treatment station (E), by means of an actuating device (8), and in that means

(10, 11, 17) are provided for the correct and automatic adjustment of the relative position between the tool (5) and the object (1).

9. Device according to Claim 6, **being**
5 **characterized by** the fact that the means for adjusting
the position comprise at least one laying face (17) to
be applied against the object (1) and a bearing (10,
11) having a spherical movement allowing adjustment of
the position parallel to one face of the object.

10 10. Device according to Claim 9, **being**
 characterized by the fact that the bearing having a
 spherical movement is formed by a ball (10) fastened to
 a support frame (7) of the tool (5) and by a recess
 (11) receiving the said ball (10) in the baseplate (12)
 15 of the tool (5), which baseplate is made adjustable in
 a base position with respect to the support frame (7)
 by springs (13).

11. Device according to Claim 9 or 10, **being characterized by** the fact that the tool (5) furthermore
20 comprises a sealing rim (16) to be applied against a
perimeter of the object.

12. Device according to Claim 11, **being characterized by** the fact that the sealing rim (16) and the laying face (17) are formed in a removable stop
25 (15) fastened to the baseplate (12).

13. Device according to one of the previous device claims, **being characterized by** the fact that the tool (5) comprises a punch (20) which can be moved by means of a cylinder (21) and has a surface for forming the profiled bead (2).

14. Device according to Claim 13, **being characterized by** the fact that a forming gasket (23) is fastened to the punch (20), which gasket, when the punch (20) is applied against the object, comes into contact with the top side of the latter and with the profiled bead, and the thickness of which gasket corresponds to the height of the profiled bead fashioned.

15. Device according to one of the previous device claims, **being characterized by** the fact that the tool (5) includes a cutting edge (19) for cutting the excess material from the fashioned portion of the
5 profiled bead (2).

16. Device according to one of the preceding device claims, **being characterized by** the fact that the support frame (7) of the tool (5) is adjustable with respect to the treatment station (E) for various shapes
10 of objects.

17. Device according to device Claim 16, **being characterized by** the fact that the actuating device includes a driving means (8) connected to the support frame (7).

15 18. Article, especially a window, comprising an object (1) provided with a profiled bead (2) extruded onto the object (1) and having a fashioned portion (3), **characterized in that** the fashioned portion (3) consists of a continuous folded ribbon of extruded
20 material, in which ribbon the contiguous surfaces of the fold or folds adhere to each other along a possibly pellicular interface, which ribbon is fashioned by contact with a shaped surface.

19. Article, especially a window, comprising an
25 object, especially a pane (1), provided with a profiled bead (2) extruded onto the object (1) and having at least one corner portion (3), **characterized in that** at least one corner portion consists of the superposition of at least two partial beads (2a, 2b) which adhere to
30 each other along a possibly pellicular interface, which superposed bead is fashioned by contact with a shaped surface.


[illegible][illegible]


	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

[illegible]



Fig. 1

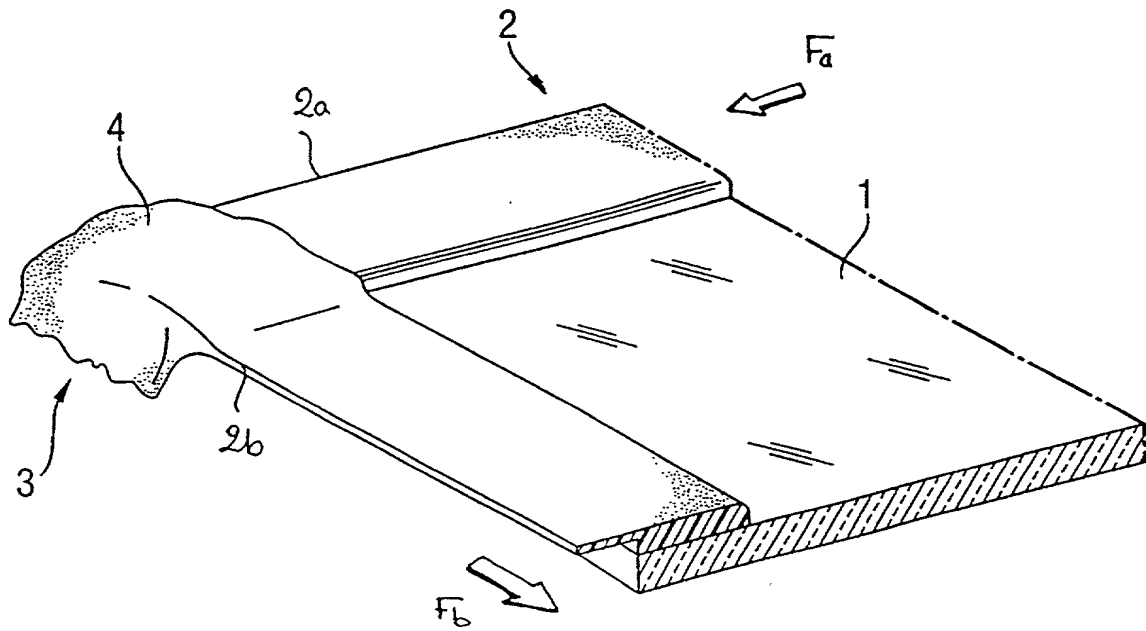**Fig. 2**

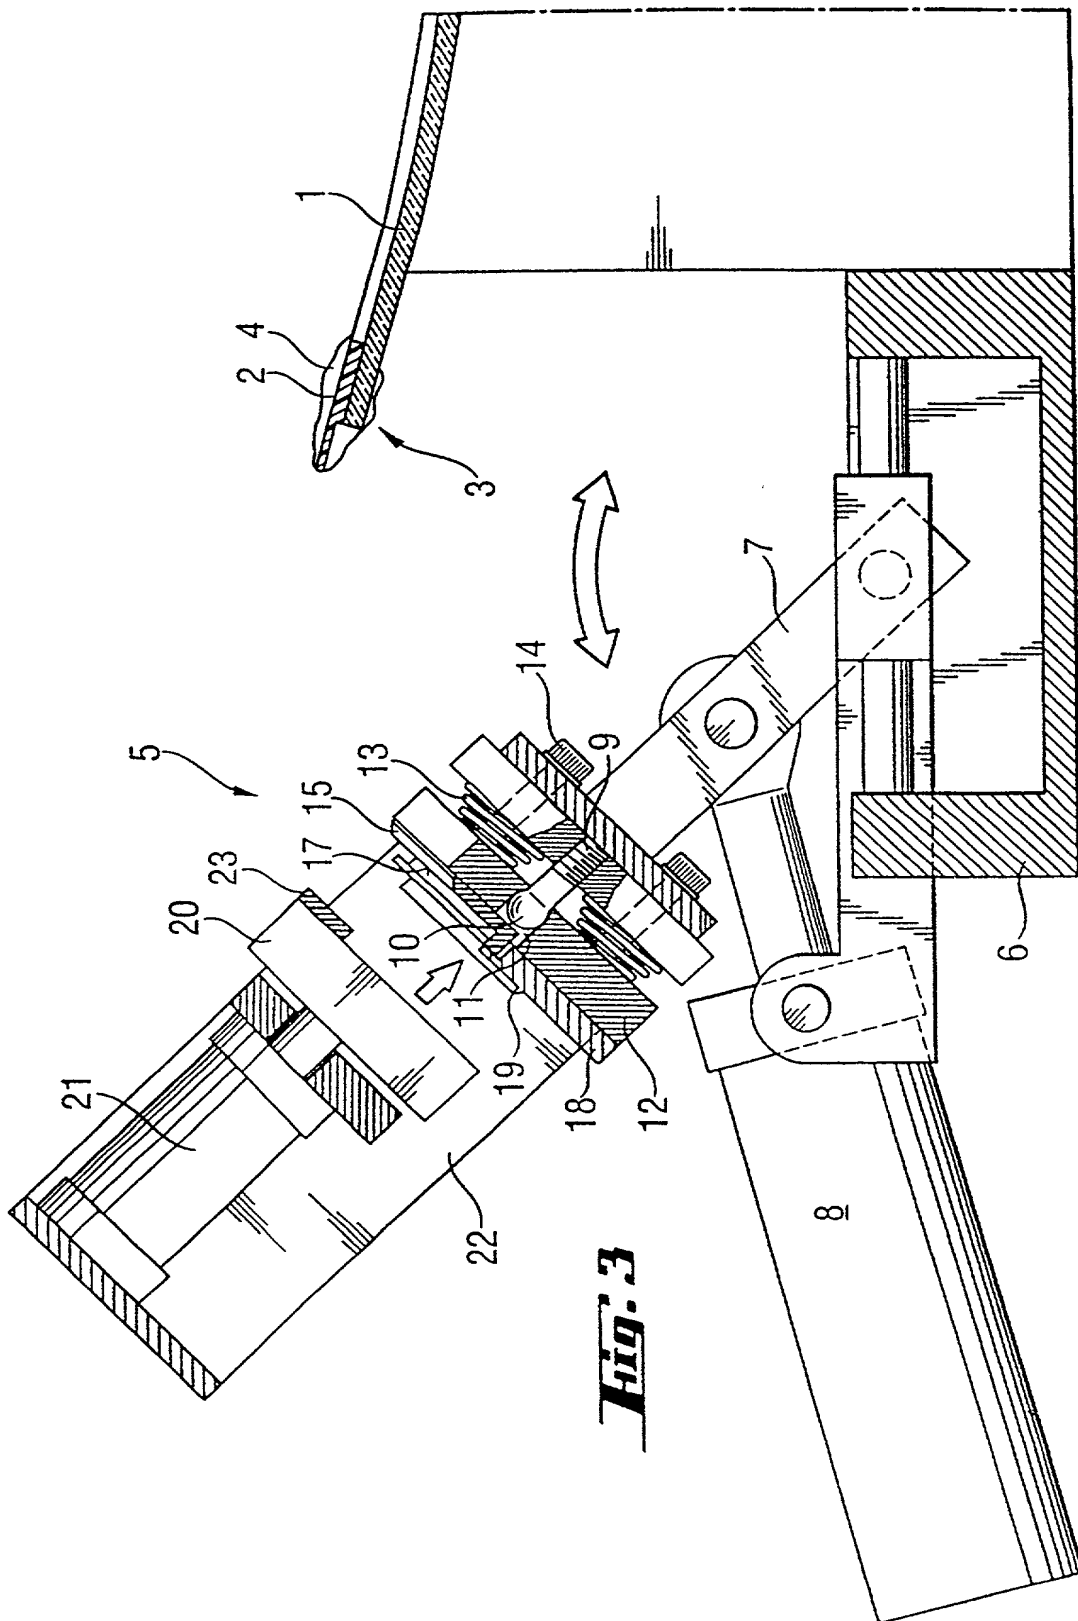



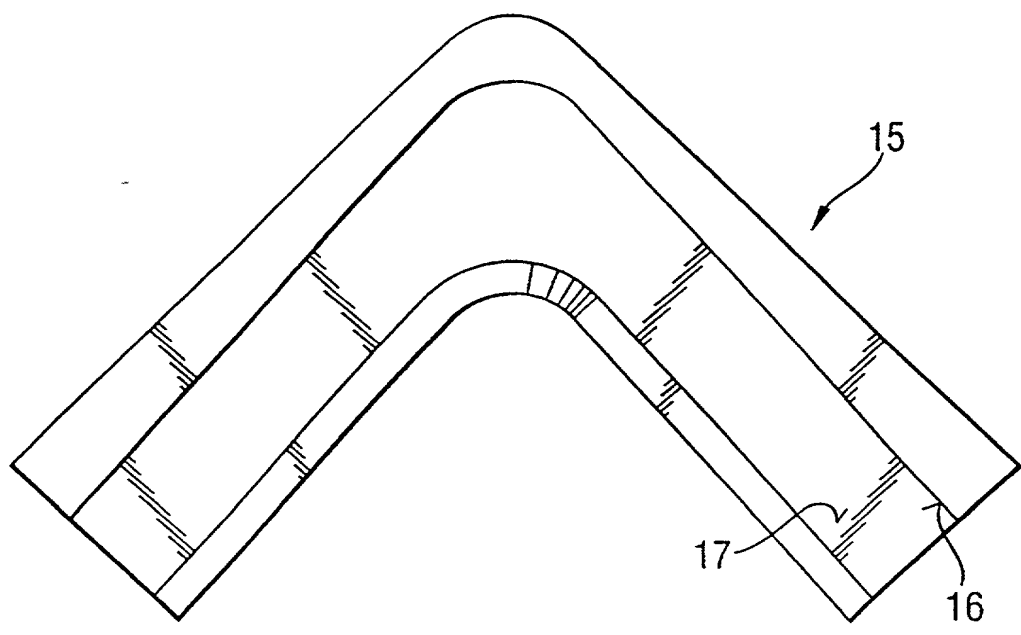


Fig. 5

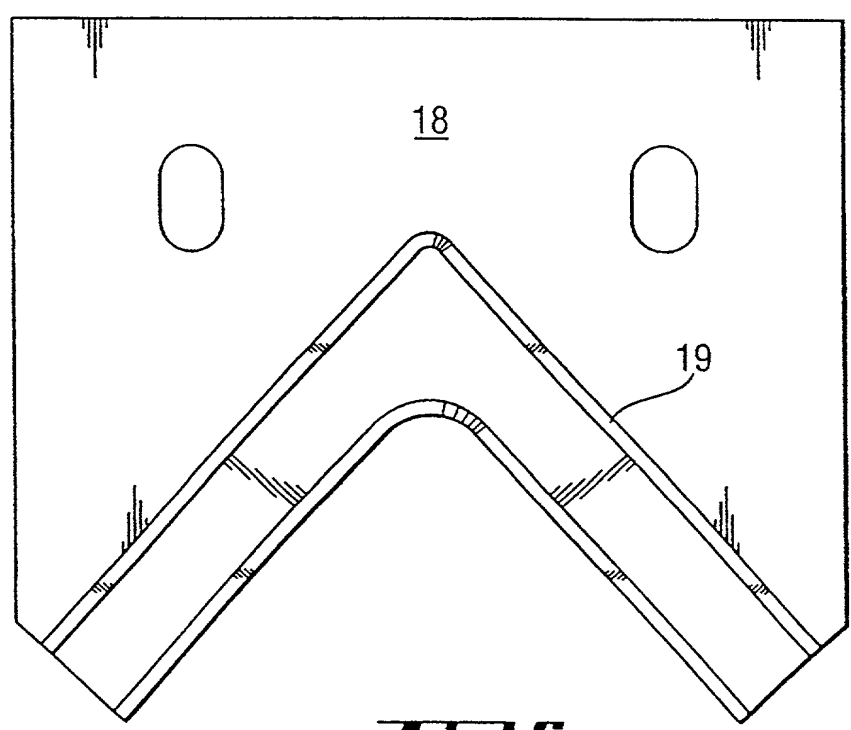
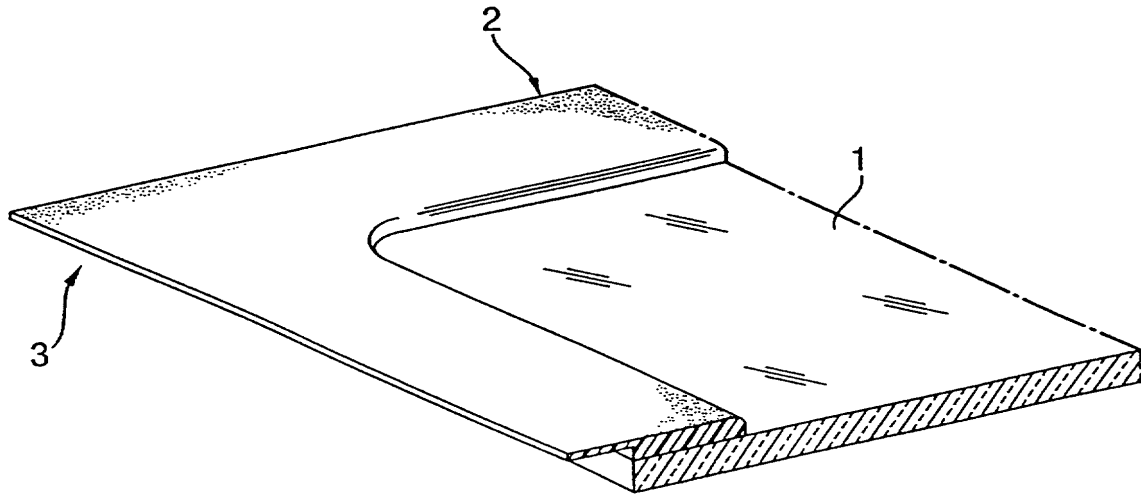


Fig. 6

003140: 2/362560

***Fig. 1***

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below at 201 et seq. underneath my name.

I believe I am the original, first and sole inventor if only one name is listed at 201 below, or an original, first and joint inventor if plural names are listed at 201 et seq. below, of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND DEVICE FOR FURNACE-WORK PRODUCTION OF AN EXTRUDED STRING RIM PORTION ON AN OBJECT AND ARTICLE COMPRISING SUCH AN OBJECT

and for which a patent application:

☒ is attached hereto and includes amendment(s) filed on *(if applicable)*

☐ was filed in the United States on as Application No. *(for declaration not accompanying application)*

with amendment(s) filed on *(if applicable)*

☒ was filed as PCT international Application No. PCT/FR99/02010 on August 18, 1999 and was amended under PCT Article 19 on *(if applicable)*

I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED PRIOR TO THE FILING DATE OF THE APPLICATION			
APPLICATION NUMBER	COUNTRY	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
DE 198 37 348.1	Germany	18 August 1998	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

APPLICATION NUMBER	FILING DATE

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	FILING DATE	STATUS		
		PATENTED	PENDING	ABANDONED

POWER OF ATTORNEY: As a named inventor, I hereby appoint S. Leslie Misrock (Reg. No. 18872), Harry C. Jones, III (Reg. No. 20280), Berj A. Terzian (Reg. No. 20060), David Weild, III (Reg. No. 21094), Jonathan A. Marshall (Reg. No. 24614), Barry D. Rein (Reg. No. 22411), Stanton T. Lawrence, III (Reg. No. 25736), Charles E. McKenney (Reg. No. 22795), Philip T. Shannon (Reg. No. 24278), Francis E. Morris (Reg. No. 24615), Charles E. Miller (Reg. No. 24576), Gidon D. Stern (Reg. No. 27469), John J. Lauter, Jr. (Reg. No. 27814), Brian M. Poissant (Reg. No. 28462), Brian D. Coggio (Reg. No. 27624), Rory J. Radding (Reg. No. 28749), Stephen J. Harbulak (Reg. No. 29166), Donald J. Goodell (Reg. No. 19766), James N. Palik (Reg. No. 25510), Thomas E. Friebe (Reg. No. 29258), Laura A. Coruzzi (Reg. No. 30742), Jennifer Gordon (Reg. No. 30753), Allan A. Fanucci (Reg. No. 30256), Geraldine F. Baldwin (Reg. No. 31232), Victor N. Balancia (Reg. No. 31231), Samuel B. Abrams (Reg. No. 30605), Steven I. Wallach (Reg. No. 35402), Marcia H. Sundeen (Reg. No. 30893), Paul J. Zegger (Reg. No. 33821), Edmond R. Bannon (Reg. No. 32110), Bruce J. Barker (Reg. No. 33291), Adriane M. Antler (Reg. No. 32605), Thomas G. Rowan (Reg. No. 34419), James G. Markey (Reg. No. 31636), Thomas D. Kohler (Reg. No. 32797), Scott D. Stimpson (Reg. No. 33607), Gary S. Williams (Reg. No. 31066), William S. Galliani (Reg. No. 33885), Ann L. Gisolfi (Reg. No. 31956), Todd A. Wagner (Reg. No. 35399), Scott B. Familant (Reg. No. 35514), Kelly D. Talcott (Reg. No. 39582), Francis D. Cerrito (Reg. No. 38100), Anthony M. Insogna (Reg. No. 35203), Brian M. Rothery (Reg. No. 35340), Brian D. Siff (Reg. No. 35679), and Alan Tenenbaum (Reg. No. 34939), all of Pennie & Edmonds LLP, whose addresses are 1155 Avenue of the Americas, New York, New York 10036, 1667 K Street N.W., Washington, DC 20006 and 3300 Hillview Avenue, Palo Alto, CA 94304, and each of them, my attorneys, to prosecute this application, and to transact all business in the Patent and Trademark Office connected therewith.

SEND CORRESPONDENCE TO:		PENNIE & EDMONDS LLP 1667 K Street, N.W. Washington, D.C. 20006		DIRECT TELEPHONE CALLS TO: PENNIE & EDMONDS LLP DOCKETING (202) 496-4721	
100 201	FULL NAME OF INVENTOR	LAST NAME <u>CORNILS</u>	FIRST NAME <u>Gerd</u>	MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY <u>Merzenich-Girbelstrath</u> <i>DEV</i>	STATE OR FOREIGN COUNTRY <u>Germany</u>	COUNTRY OF CITIZENSHIP <u>Germany</u>	
	POST OFFICE ADDRESS	STREET <u>Dechant-Fabry-Grasse 48</u>	CITY <u>Merzenich-Girbelstrath</u>	STATE OR COUNTRY <u>Germany</u>	ZIP CODE <u>D-52399</u>
200 202	FULL NAME OF INVENTOR	LAST NAME <u>FISCHER</u>	FIRST NAME <u>Florian</u>	MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY <u>Aachen</u> <i>DEV</i>	STATE OR FOREIGN COUNTRY <u>Germany</u>	COUNTRY OF CITIZENSHIP <u>Germany</u>	
	POST OFFICE ADDRESS	STREET <u>Ottostrasse 80</u>	CITY <u>Aachen</u>	STATE OR COUNTRY <u>Germany</u>	ZIP CODE <u>D-52070</u>
300 203	FULL NAME OF INVENTOR	LAST NAME <u>VERBEEK</u>	FIRST NAME <u>Stefan</u>	MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY <u>Waldfeucht-Haaren</u> <i>DEV</i>	STATE OR FOREIGN COUNTRY <u>Germany</u>	COUNTRY OF CITIZENSHIP <u>Germany</u>	
	POST OFFICE ADDRESS	STREET <u>Johannesstrasse 18</u>	CITY <u>Waldfeucht-Haaren</u>	STATE OR COUNTRY <u>Germany</u>	ZIP CODE <u>D-52525</u>
204	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP	
	POST OFFICE ADDRESS	STREET	CITY	STATE OR COUNTRY	ZIP CODE
205	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP	
	POST OFFICE ADDRESS	STREET	CITY	STATE OR COUNTRY	ZIP CODE
206	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP	
	POST OFFICE ADDRESS	STREET	CITY	STATE OR COUNTRY	ZIP CODE

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 100	SIGNATURE OF INVENTOR 102	SIGNATURE OF INVENTOR 103
DATE 07.04.2000	DATE 07/06/00	DATE 07.07.00 (07/01/2000)
SIGNATURE OF INVENTOR 104	SIGNATURE OF INVENTOR 105	SIGNATURE OF INVENTOR 106
DATE	DATE	DATE